


Project Facts

Below Grade Waterproofing University Lutheran Chapel



Location:	Ann Arbor, MI
Cost:	\$105,000
Start Date:	September, 2006
Duration:	One Month

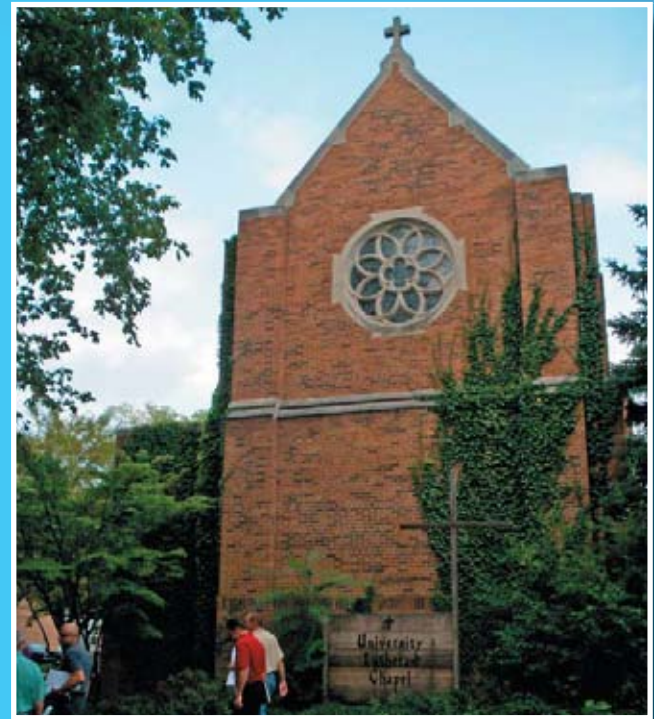

- ### Services Provided
- Foundation excavation
 - Laurenco membrane installation
 - Drain tile installation
 - Concrete patios and sidewalks

Project Description

The interior basement walls of the chapel were experiencing significant water damage. Western excavated 410 lineal feet around the chapel perimeter to uncover the basement and foundation walls. A thin layer of deteriorating asphaltic tar from the early 1900's was the only existing protection from water infiltration. Western applied Laurenco waterproofing membrane on the basement and foundation walls and laid new foundation and storm drain tile. After backfilling with dirt and pea gravel, new concrete patios and sidewalks were poured.



RAM Construction Services • 13800 Eckles Road • Livonia, MI 48150 • Tel 734-464-3800

The oldest and most experienced waterproofing and restoration specialty contractor in the U.S.

www.ramconstructionservices.com