

Location: Ann Arbor, MI
Cost: \$1,041,000
Start Date: December, 2005
Duration: Eight months



Services Provided

- Protection of sensitive elements
- Concrete seating riser replacement
- Cleat and beam repair
- Bracket and seat installation

Project Description

Western removed and replaced 20 sections or 110,000 square feet of concrete seating risers. The project required temporary protection of 90,000 square feet of the field bowl and 625 lineal feet of wood wall to stop rolling concrete debris.

Damaged suspended slab cleats and beams were repaired. Eight sections of newer aluminum seating planks were removed and salvaged. Approximately 52,000 lineal feet of salvaged and new seating planks and 13,000 brackets were installed in less than 3 months. The entire project was completed 3 weeks ahead of schedule.

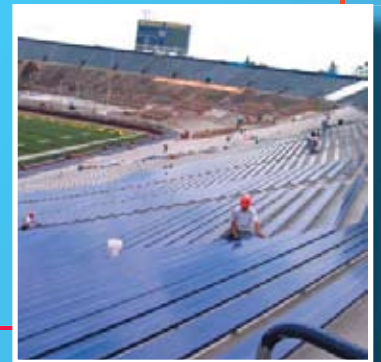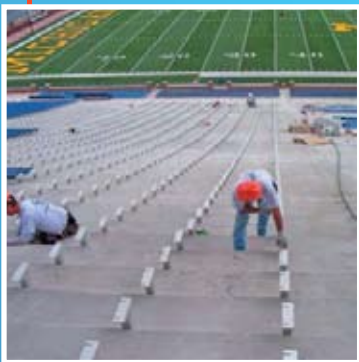

RAM Construction Services • 13800 Eckles Road • Livonia, MI 48150 • Tel 734-464-3800

The oldest and most experienced waterproofing and restoration specialty contractor in the U.S.

www.ramconstructionservices.com